

## Warranty

Whilst every Lucent product is manufactured to the highest quality standards, we offer a comprehensive Warranty for complete peace of mind.

### Residential Use

15 Years	Replacement product or parts
10 Years	Finish / 5 years matte black
1 Year	Labour & Flexible hoses

### Commercial Use

5 Years	Replacement product or parts
1 Year	Labour & Surface Finish

Warranty may become void due to any of the following:

- Inability to provide proof of purchase or equivalent documentation
- Product not installed by a licensed Plumber
- Failure to install product to national standards and state regulations
- Failure to install product in accordance with manufacturers installation instructions
- Pressure and Temperature Requirements:

- Hydro Static inlet pressure range: 150 to 500kPa
- Maximum hot water temperature 75 degree celsius
- Recommended operating temperatures: 1 to 75 degrees celsius

- Fitting of non-approved flow controllers in tap bodies or outlets
- If products are used for outdoor applications.
- Product used for non-potable water applications.
- Damage because of insufficient flushing of lines prior to installation. Service, repairs, or installation of non-Lucent replacement parts undertaken without Lucent's prior written approval.
- Damage to finishes caused by non adherence to cleaning instructions.

## Cleaning Instructions:



CLEAN MICROFIBRE  
CLOTH



SOAPY WATER



PH BALANCE  
SOAP - BASED  
CLEANSER

### WARRANTY SERVICE


For all warranty service calls, please contact your local store.  
Phone: 1300 474 714  
E-mail: [warranty@lucentdesigns.com.au](mailto:warranty@lucentdesigns.com.au)



INS\_1005.pdf rev.1.0

# LUCENT<sup>®</sup>

## Installation and Operating Instructions



## 92204 HAND SHOWER ON HOLDER 60MM AND 75MM WALL PLATES



Thank you for purchasing a quality Lucent product. Please note that this product must be installed by a qualified and registered plumber who is compliant with all the relevant regional requirements and who holds current certification.

Note: Please read all instructions prior to installation to limit warranty disputes should a claim arise.

## Water Supply Requirements



recommended  
working pressure  
**350KPa**



maximum hot  
water temperature  
**75 degrees**

### Pressure

- Recommended Minimum Hydrostatic Pressure: 150 to 500 kPa
- This pressure may be exceeded only under test conditions.
- Where hydrostatic pressure exceeds 500kPa, pressure limiting valve must be installed as per AS/NZS 3500

### Temperature

- Water Temperature Range: 1°C to 75°C

### Suitable Hot water Units

- Storage Tank: Yes
- Continuous Flow: Yes

NOTE: An additional Back Flow Prevention Device may be needed to comply with AS 3500.




## Installation Instructions

Note to Plumber: Please provide this leaflet to the owner after installation.

### STEP 1


After sliding the preferred Dress Plate over the Holder, Apply PTFE Tape to the Threaded Outlet, and screw the Holder onto the Threaded Outlet.

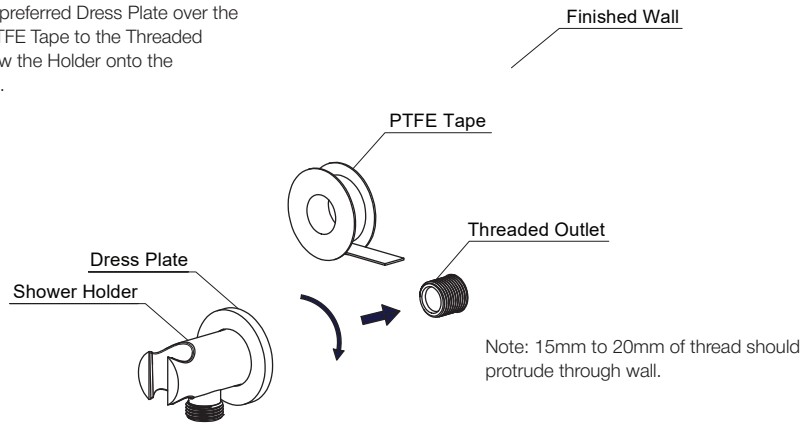

### STEP 2

Ensure the Flow Restrictor and Rubber Washer are fitted to the Shower Hose. Screw the Hose to the Holder.

Note: Select preferred Wall Plate, 60mm & 75mm provided.

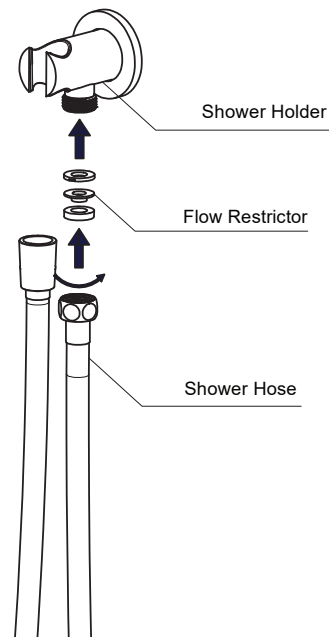

### STEP 3

Ensure washer is inserted to the end of the hose & screw onto the Shower Head.

