


LUCENT[®]

Installation and Operating Instructions



SEREIA/LEKKI WALL BASIN/BATH SPOUT 93316 RANGE

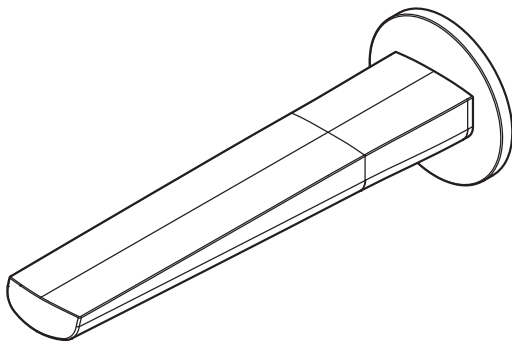

Thank you for purchasing a quality Lucent product. Please note that this product must be installed by a qualified and registered plumber who is compliant with all the relevant regional requirements and who holds current certification.

Note: Please read all instructions prior to installation to limit warranty disputes should a claim arise.

Water Supply Requirements



recommended
working pressure
350KPa



maximum hot
water temperature
75 degrees

Pressure

- Maximum Hydrostatic Pressure - 1000kPa
- This pressure may be exceeded only under test conditions as per AS/NZS3500,
- Recommended Minimum Hydrostatic Pressure – 150 kPa

Temperature

- Water Temperature Range – 1°C to 75°C


Suitable Hot water Units

- Storage Tank: Yes
- Continuous Flow: Yes
- Gravity Feed: Not recommended.

Installation Instructions

Note to Plumber: Please provide this leaflet to the owner after installation.

After applying PTFE Tape to the Threaded Outlet, screw on the Spout.

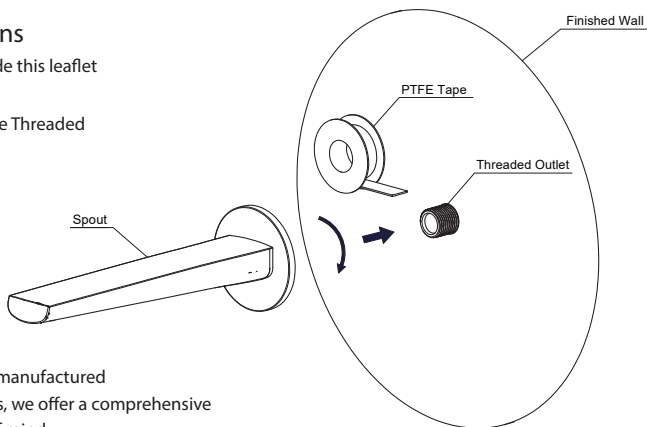

Warranty

Whilst every Lucent product is manufactured to the highest quality standards, we offer a comprehensive Warranty for complete peace of mind.

Residential Use

15 Years Replacement Product or Parts
1 Years Labour

Commercial Use

7 Years Replacement Product or Parts
1 Year Labour

Warranty may become void due to any of the following:

- Inability to provide proof of purchase or equivalent documentation
- Product not installed by a licensed Plumber
- Failure to install product to national standards and state regulations
- Failure to install product in accordance with manufacturers installation instructions
- Pressure and Temperature Requirements:
 - Static inlet pressure range: 150 to 500kPa
 - Maximum hot water temperature 75 degree celsius
 - Recommended operation temperatures: 1 – 75 degrees celsius
- Fitting of non-approved flow controllers in tap bodies or outlets
- If products are used for outdoor applications.
- Product used for incorrect application, non-potable water, gravity fed applications etc.
- Damage because of insufficient flushing of lines prior to installation. Service, repairs, or installation of non-Lucent replacement parts undertaken without Lucent's prior written approval.
- Damage to finishes caused by non adherence to cleaning instructions.

Cleaning Instructions:



CLEAN
MICROFIBRE
CLOTH



SOAPY
WATER



PH BALANCE
SOAP - BASED
CLEANSER

Warranty Service

For all warranty service calls please contact your local store.

Phone: 1300 474 714

E-mail: warranty@lucentdesigns.com.au

