


LUCENT[®]

Installation Instructions

This product must be installed by a licensed plumber. All plumbing work must comply with Australian/New Zealand Standard AS/NZS 3500.
Note to Plumber: Please provide this leaflet to the owner after installation.

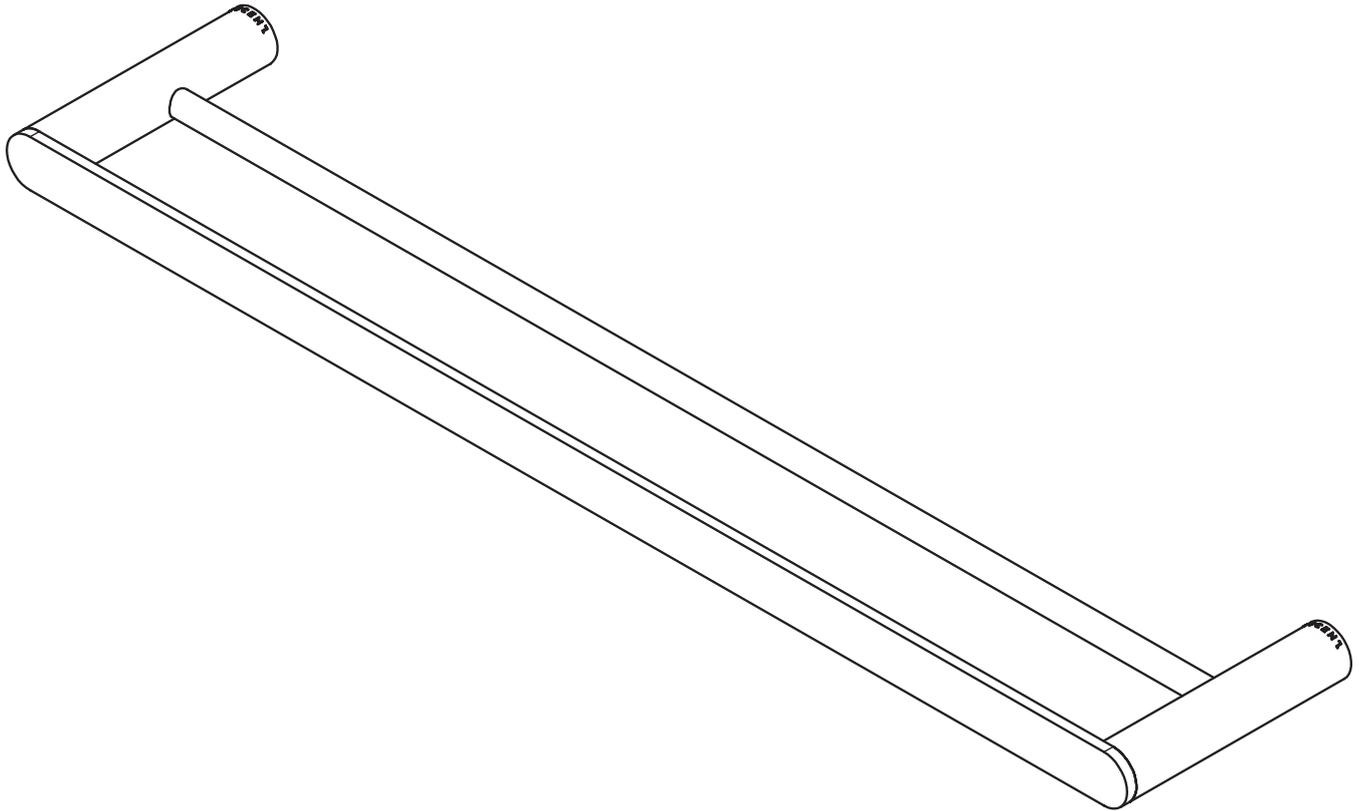

Double Towel Rail
800mm

Product Codes

91810

Cleaning instructions



Clean Microfibre
Cloth






Mild Soapy
Water



PH Balance Soap
- Based Cleanser

Step 1

Using the appropriate hardware, fix the accessory mounts to the wall using the provided measurements.

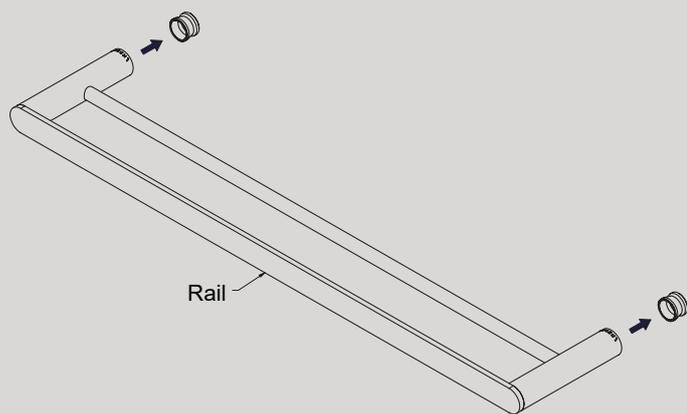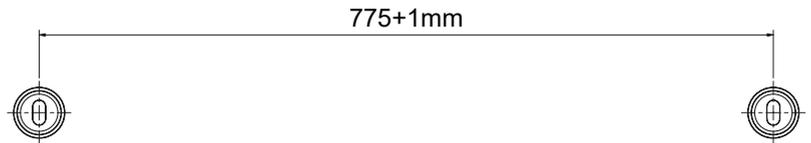


Step 2

Push the rail onto the accessory mounts.

Step 3

Secure both screws using the provided hex key.

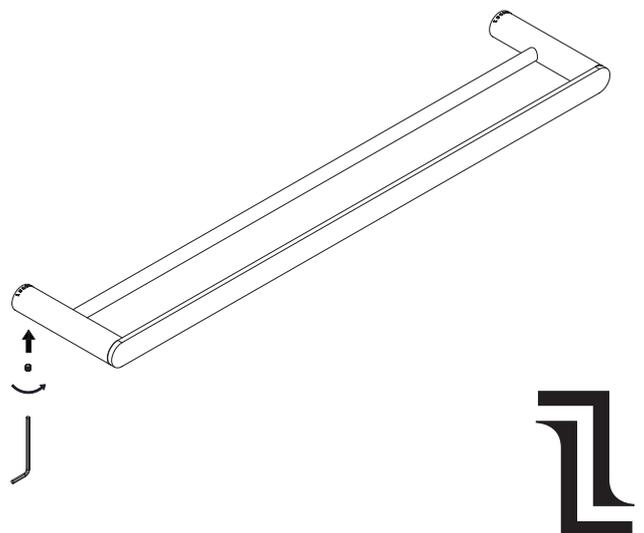

LUCENT[®]

Installation Instructions

Thank you for purchasing a quality Lucent product. Please note that this product must be installed by a qualified and registered plumber who is compliant with all the relevant regional requirements and who holds current certification.

Note: Please read all instructions prior to installation to limit warranty disputes should a claim arise.

RESIDENTIAL USE

Category	Warranty Period	Inclusions	Details
Mixers	20 Years	Replacement cartridge	Replacement of product or components exclusively. Damages to ceramic discs caused by copper pieces, plastic, sand, dirt, thread tape or any other material are excluded.
	10 Years	Replacement product or parts	
	2 Years	Labour	
	2 Years	Flexible hoses, spray nozzle	
	2 Years	Pull out hand piece	
Tapware <small>(three piece)</small>	10 Years	Replacement product or parts	Replacement of product or components exclusively
	2 Years	Labour	
	1 Year	Ceramic disc and jumper valve	
Showers & Outlets	15 Years	Replacement product or parts	Replacement of product or components exclusively
	2 Years	Labour	
	2 Years	Flexible hoses	
Accessories	7 Years	Replacement product or parts	Replacement of product or components exclusively
Wastes & Traps	1 Year	Replacement product or parts	
Drains	10 Years	Replacement product or parts	
PVD & Chrome Finish	10 Years	Replacement product or parts	Replacement of product or components exclusively. Excludes scratches, dents, and typical wear and tear after installation. Does not cover corrosion from harsh cleaners, hard water, or coastal
Electroplated Finish	2 Years	Replacement product or parts	

COMMERCIAL USE

Category	Warranty Period	Inclusions	Details
Mixers	15 Years	Replacement cartridge	Replacement of product or components exclusively. Damages to ceramic discs caused by copper pieces, plastic, sand, dirt, thread tape or any other material are excluded.
	7 Years	Replacement product or parts	
	1 Year	Labour	
	1 Year	Flexible hoses, spray nozzle	
	1 Year	Pull out hand piece	
Tapware <small>(three piece)</small>	15 Years	Replacement product or parts	Replacement of product or components exclusively
	1 Year	Labour	
	1 Year	Ceramic disc and jumper valve	
Showers & Outlets	5 Years	Replacement product or parts	Replacement of product or components exclusively
	1 Year	Labour	
	1 Year	Flexible hoses	
Accessories	1 Year	Replacement product or parts	Replacement of product or components exclusively
Wastes & Traps	1 Year	Replacement product or parts	
Drains	10 Years	Replacement product or parts	
PVD & Chrome Finish	1 Year	Replacement product or parts	Replacement of product or components exclusively. Excludes scratches, dents, and typical wear and tear after installation. Does not cover corrosion from harsh cleaners, hard water, or coastal
Electroplated Finish	1 Year	Replacement product or parts	

Warranty

Whilst every Lucent product is manufactured to the highest quality standards, we offer a comprehensive Warranty for complete peace of mind.

Warranty may become void due to any of the following:

Inability to provide proof of purchase or equivalent documentation

Product not installed by a licensed Plumber

Failure to install product to national standards and state regulations

Failure to install product in accordance with manufacturers installation instructions

Pressure and Temperature Requirements:

- Hydrostatic inlet pressure range: 150 to 500kPa
- Maximum hot water temperature 75 degree celsius
- Recommended operating temperatures: 1 to 75 degrees celsius

Fitting of non-approved flow controllers in tap bodies or outlets

If products are used for outdoor applications.

Product used for non-potable water applications.

Damage because of insufficient flushing of lines prior to installation. Service, repairs or installation of non-Lucent replacement parts undertaken without Lucent's prior written approval.

Damage to finishes caused by non adherence to cleaning instructions.

Warranty Service

Phone: 1300 474 714

E-mail: warranty@lucentdesigns.com.au

